

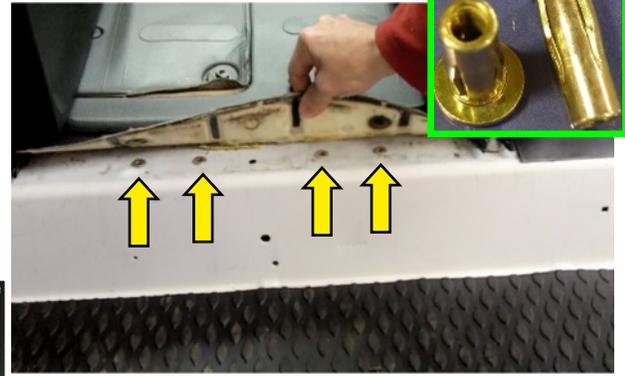


# Installing the Promaster black center console

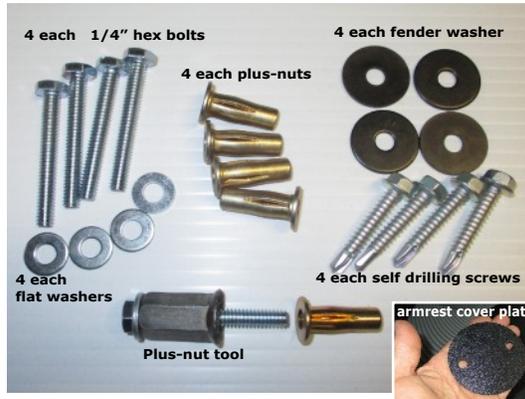

The Promaster cab console comes with an aluminum mounting base, black vinyl covered console and a mounting hardware kit. Included in the mounting kit are fasteners called plus-nuts (inset photo) which will be deployed in the 4 existing holes in the Promaster floor (yellow arrows). Installation of the plus-nuts is done using the included special tool., with the procedure shown below.

## assemble plus-nut and tool

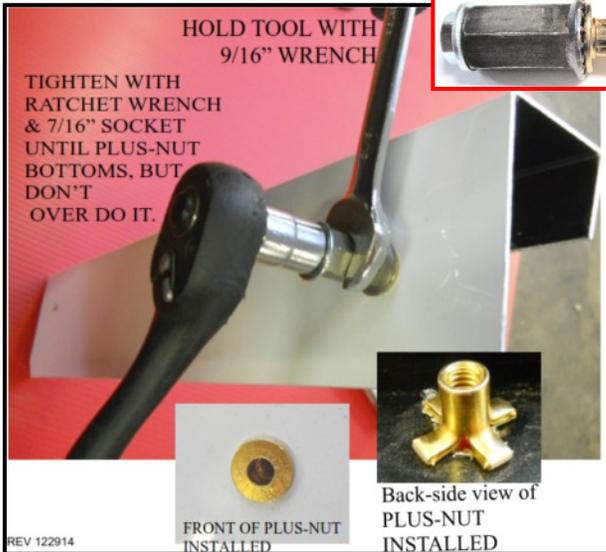

Set the aluminum base into position between the seats, and thread the four hex bolts & washers down through the aluminum base and into the plus-nuts you had just installed. You should remove the protective film from the aluminum base before fastening down.



Set the black console onto the aluminum base, making sure that it is centered left-to-right. Also make sure that it's centered such that it overhangs equally on the front as well as the back. Once its set as described, use the four self-drilling screws and fender washers to screw the console down to the aluminum base.



Armrest cover plate installed

The black console will be attached to the aluminum base using the self drilling screws and fender washers. The best way to do this is by using a power driver with a 3/8 inch socket. If needed, you can lift out the plastic drink holder to help installing the front screws. There will also be a round, black plastic cover plate included to cover up the holes left by the armrest you may have needed to remove from the passenger seat earlier. At this point this installation will be complete after vacuuming any metal chips left by the self drilling screws.

